

## LOAD CROWNING

There have been a few log loads entering our log yards that are not properly crowned when loaded. When logs on the top of loads do not have contact with a chain they are able to slip out. This creates a significant hazard or risk.




Please ensure all loads are properly crowned.

Drivers – ensure your loads are crowned properly before chaining up. If they aren't, please get the loader driver to re load for you.


All loads should also be belly chained – both truck and trailer.

Load safety continues to be closely monitored in our log yards – both Kinleith and Tasman.

Please ensure all loads are safe and compliant.

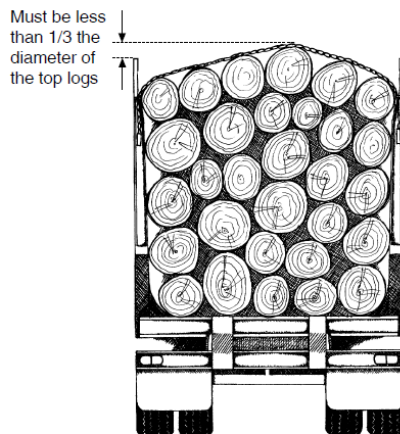

Shape and height of the load

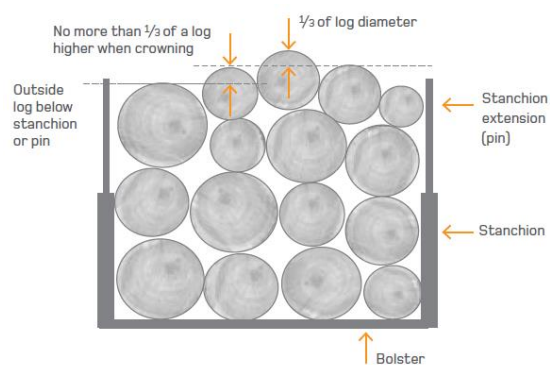

**THE TOP OF THE LOAD SHALL BE ROUNDED SO THAT THE LOAD-SECURING DEVICE WILL CONTACT AS MANY LOGS AS POSSIBLE** - (ACOP for Safety and Health in Forest Operations)

For any queries please contact:

Richard Sherratt, Tasman Log Yard Manager:

Adam Mills, Kinleith Log Yard Manager:

Rachael Johnston, H&S Advisor:

027 441 2305

027 472 9693

027 455 1712